


The Blokart Foiled MSP's have been designed to help protect the mast and sail in the event of a capsize.

Highly recommended when sailing on hard surfaces and a must for commercial operators when sailing on asphalt, concrete etc!

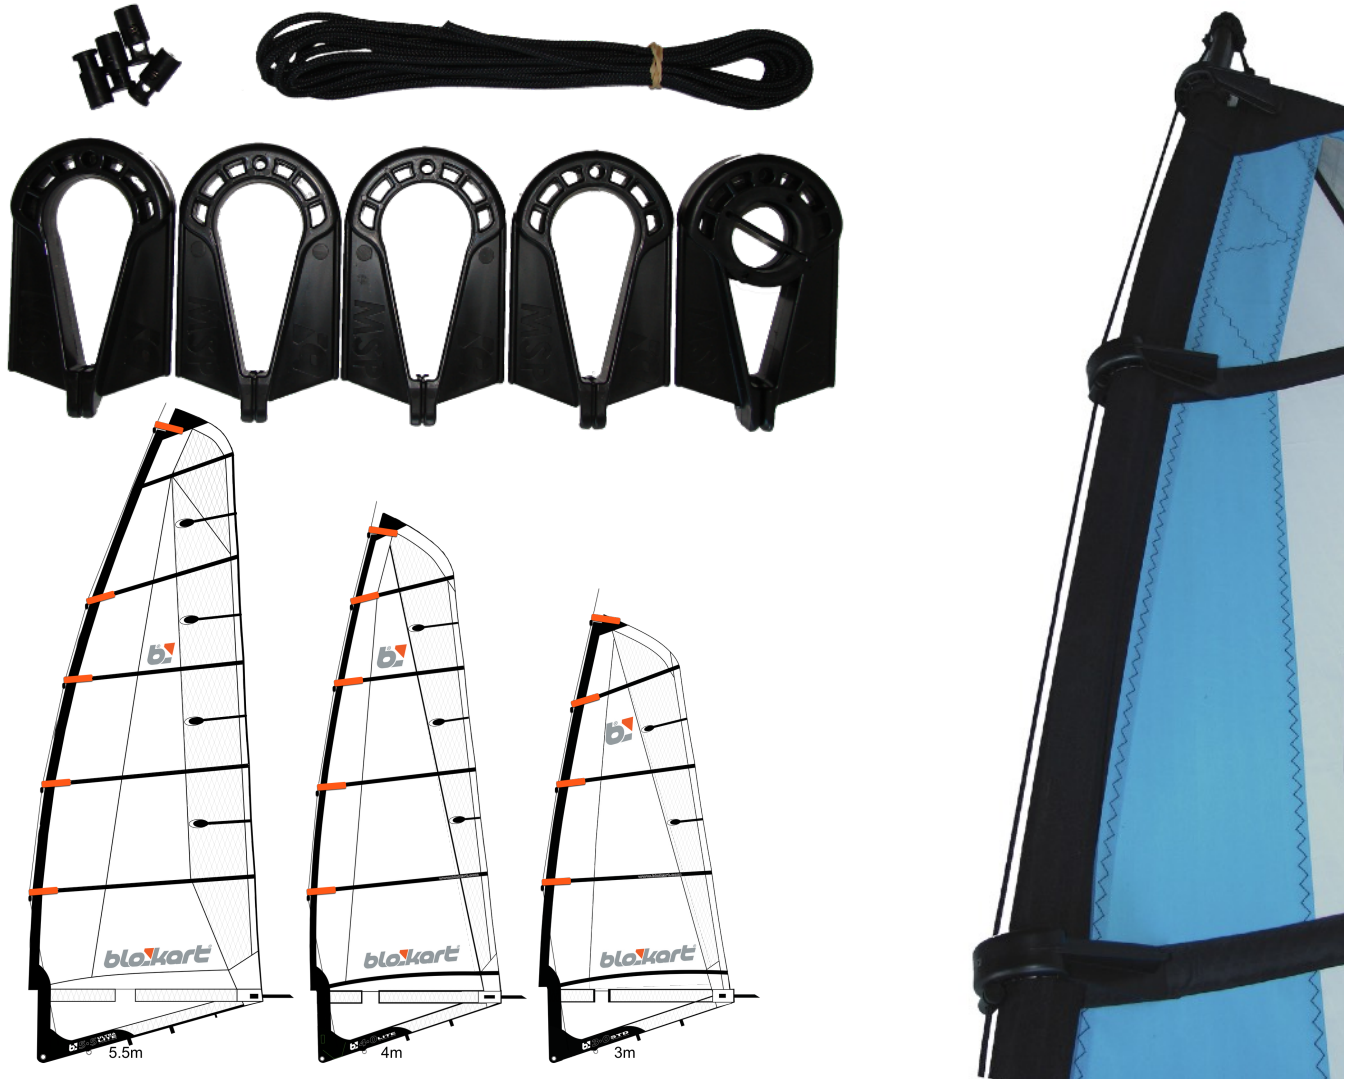

### Features include:

- The unique design which allows the sail to rotate freely on the mast while offering maximum protection. This new design not only helps keep the sail fabric and batten pockets off the ground but they protect the mast tip and mast crane (if being used).
- The design assists setting of the sail and rotation of battens in light air.
- Available in sets of 5 pieces for all sail and mast configurations
- Able to be used without the locating cord to eliminate drag and maximise performance.

## INSTRUCTIONS

1. Set up your chosen sail as usual, but do not fit the Turban/Mast Crane or Downhaul yet.
2. Lay rig over and slip the required number Foils over the top of the mast and onto sail. The last/top Foil is supplied with a spacer to ensure a snug fit on the thin Top mast section.  
**Note:** The spacer is not required when using a 2nd mast section at the top of the mast.
3. Fit the top Foil with the knots in the bungee/elastic facing up and slide the Foil down the mast, but not onto the mast pocket.
4. Thread one end of the cord through the Turban as pictured, or loop over your Mast Crane, and tie-off.
5. Fit your turban or Mast Crane and downhaul the sail.
6. Locate the top Foil 10mm or so above the mast sleeve pocket as pictured.
7. Slide the bottom/first Foil down the sail over battens to locate it over the first batten up from shelf of the sail as pictured. **Note:** You may need to position the battens to allow the foil to pass.



8. Slide the remaining foils down the mast and locate them over the battens as in the diagram over the page.
9. Thread the cord, which is attached to the Turban or Crane, through the front hole of each Foil followed by a barrel lock which will locate under each Foil to keep them positioned on each batten.

**Note:** The top/first Foil does not require a barrel lock as the top of the sail keeps it in position.

10. Thread the remaining cord through the yoke in the Boom and stuff the excess cord in the pocket at the foot of the sail.

**Note:** The cord can be cut to length under the bottom barrel lock but if using the MSP's on different size sails you will need a length of cord for each.

### **Optional Floating Position:**

Performance sailors wanting to eliminate any resistance that the cord and barrel locks may create can fit the MSP's without the locating cord. Simply position each Foil on each batten, but note that the Foil's may need re-positioning from time to time, especially after a capsize or laying the kart on its side.

**Note:** The Blokart Foiled MSP's offer great protection, far more than the old design, but there will be circumstances where damage may occur.

